









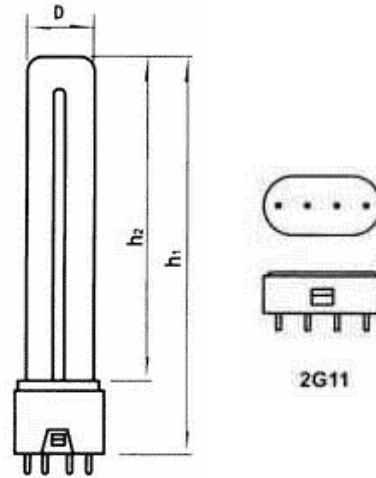


PL-L40W (4 pins) Compact Fluorescent Lamp



Working For A Brighter World

Offices Airport/Train Stations Walkways/Courtyards SC-Wall Sconce	Retail 1X2-Parabolic	Corridors/Stairwells Coves/Valences Parking Garages 2x2-Parabolic	Lobbies/Atriums Building Facades Conversion Kits SM-Surface Mount	Hotel Rooms Work Stations Screw Adapter TR-Track
 	 	 	 	 
PT-Post Top	UC-Under Cabinet	LL-Linear Strip	IN-Indirect pendant	FL-Floor Lights

Features:

- The 4-pin base allows for operation on rapid start, electronic and dimming circuits
- Particularly well suited to commercial interior lighting application

Type	Nominal Watt(W)	Luminous Flux(Lm)	Rendering index(Ra)	Color Temp.(K)	Rated Ave. life(h)	Lamp Base	Dimensions (mm)				Std. Pkg. CTN (pcs)
							d	h1	h2	D	
PL-L18W	18	1200	82	2700 ↓	10000	2G11	17	217	195	38	50
PL-L24W	24	1700	82	3500 ↓		2G11	17	317	295	38	
PL-L36W	36	2700	82	4200 ↓		2G11	17	411	379	38	
PL-L40W	40	3100	82	5000 ↓		2G11	17	533	501	38	
PL-L55W	55	4100	82	6400		2G11	17	533	501	38	

- *Lamp life defined according to international standard*