











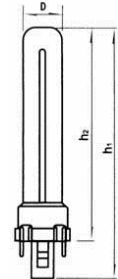

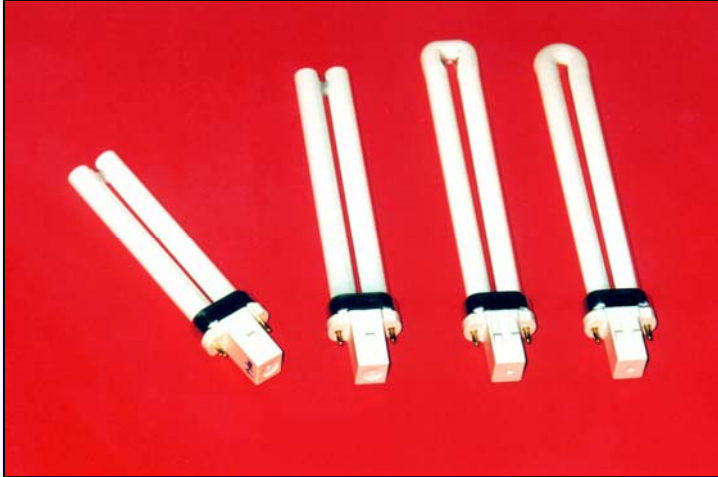





**PL-S13W Compact Fluorescent Lamp (F13BX/CF13DS/CFT13)**



**Working For A Brighter World**

Offices	Retail	Corridors/Stairwells	Lobbies/Atriums	Hotel Rooms
Airport/Train Stations		Coves/Valences	Building Facades	Work Stations
Walkways/Courtyards		Parking Garages	Conversion Kits	Screw Adapter
RD-Recessed Downlight	SC-Wall Sconce	LL-Linear Strip	SM-Surface Mount	TF-Table/Floor
				
DL-Desk Lamp	UC-Under Cabinet	WL-Work Light	ST-Step & Aisle	EX-Exit Signs
				
FL-Floor Lights	PT-Post Top	PB-Path/Border Lights	BL-Bollard	
				

Type	Nominal Watt(W)	Luminous Flux(Lm)	Rendering index(Ra)	Color Temp.(K)	Rated Ave. life(h)	Lamp Base	Dimensions(mm)				Std. Pkg. CTN (pcs)
							d	h1	h2	D	
PL-S5W	5	250	82	2700	10000	G23	12	107	85	27	200
PL-S7W	7	400	82			G23	12	137	115	27	
PL-S9W	9	600	82	G23		12	167	145	27		
PL-S13W	13	800	82	4200		GX23	12	172	166	27	
PL-S13W	13	800	82	↓		2G11	12	186	164	27	
PL-S13W	13	800	82	6400		2GX7	12	186	164	27	

- Lamp life defined according to international standard