


PL-T (4 pins) Compact Fluorescent Lamp (F26TBX/CF26DT/CFM26)

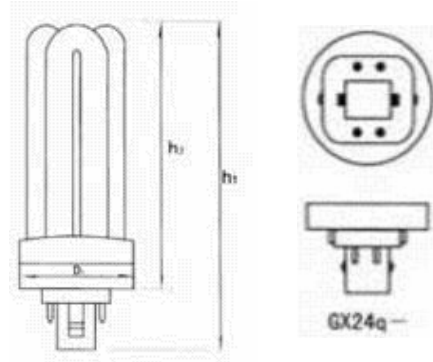

Working For A Brighter World

Applications:

Downlights for general illumination
 Wall washer for accent and display lighting
 Jelly jar Fixture
 Conference Rooms
 Lobbies, Stairways and Corridors

Ideal for:

Office Retails Hotel/Motel
 Restaurants Property Management
 Education Healthcare
 Outdoor/Security



SM-Surface Mount



ST-Step & Aisle



FL-Flood Lights



RD-Recessed Downlight/Wall Washer

Features:

- Designed for operation on electronic ballasts with the 26W and 32W interchangeable
- The 26W & 32W can apply for the same lamp holder with PL-C26W (4-pins), and the 18W can share the lamp fitting with PL-C18W(4-pins)
- A combination of bends & bridges for 25% shorter length compared with PL-C (cluster) lamp

Type	Nominal Watt(W)	Luminous Flux(Lm)	Rendering index(Ra)	Color Temp.(K)	Rated Ave. life(h)	Lamp Base	Dimensions (mm)				Std. Pkg. CTN (pcs)
							d	h1	h2	D	
PL-T18W	18	1200	82	2700	10000	GX24q-2	12	121	107	48	100
PL-T26W	26	1780	82	3000 3500		GX24q-3	12	131	117	48	
PL-T32W	32	2080	82	4200 5000		GX24q-4	12	147	133	48	
PL-T42W	42	2730	82	6400		GX24q-4	12	163	149	48	

- Lamp life defined according to international standard